

**Palmetto Ford Truck Sales, Inc**  
**Florida Sheriff's FSA18-VEH16.0 Cab Chassis Trucks and Heavy**  
**Equipment**

**Effective October 1, 2018 – September 30, 2019**

City of Hallandale Beach  
Mr. Y Lobo

|                                          |               |
|------------------------------------------|---------------|
| Autocar base spec - Western Districts    | \$ 139,850.00 |
| ISL Cummins 330 HP                       | \$ (6,812.00) |
| Right Hand Drive                         | \$ 588.00     |
| Air Assist for Cab Tilt                  |               |
| Air Drain w/ Central Manifold & Petcocks | \$ 69.00      |
| Refuse Heavy Hauler Package              | \$ 11,624.00  |
| New Tag                                  | \$ 350.00     |
| Diamond Plate Floor                      | \$ 156.00     |
| Automated Lube System                    | \$ 8,964.00   |
| Automated Side Loader                    | \$ 155,495.00 |
| Power Mirrors                            | \$ 735.00     |
| Diamond Plate Driver Floor               | \$ 65.00      |
| 2 Additional Dash Switches               | \$ 50.00      |
| Single Visibility Window                 | \$ 220.00     |
| New Way Incentive                        | \$ (4,865.00) |

|                              |                      |
|------------------------------|----------------------|
| <b>Total Price Delivered</b> | <b>\$ 306,489.00</b> |
|------------------------------|----------------------|

Approval: \_\_\_\_\_

Print Name: \_\_\_\_\_

Purchase Order Number: \_\_\_\_\_

**EQUIPMENT LIST**  
City of Hallandale Beach  
December 10, 2018

New Way Sidewinder  
31 Cubic Yard Body Capacity  
Pack On The Go  
Multi Cycle Packer  
Twin 14.5" x 7" Clean Out Doors  
Chrome Cylinder Rods  
Side-Access Door to Hopper  
Nitro Carbonite Single Hoist Cylinder  
Sight Gauge on Reservoir Tank  
High Grade Hydraulic Fluid  
Reinforced, Frame Mounted Arm – 1,000 lb. Lift Capacity  
Heavy Duty Chains for Standard Arm  
In-Line Heavy Duty Grippers  
Sealed Roller Bearings on Packer Follower Panels  
Pre-crusher Panel  
Hopper Access Ladder  
Ergonomic In-Cab Control Panel and Joystick  
Positive Automatic Tailgate Lock  
Smooth Body Sidewall Design  
Acrylic Urethane Enamel Single Color Paint on Body  
ARM Powder Coat New Way Safety Yellow  
Rear Vision Camera System, Dual Cameras  
Back Up Alarm  
Body Ajar Alarm  
Tailgate Ajar Alarm  
Hour Meter  
"Arm Stowed" Indicator  
LED Body Lights  
LED Work Lights: 1 in Hopper, 1 Curbside Toward Arm  
Strobe Light Package (Mounted Upper Tailgate)  
Strobe Light, Surface Mount  
10 lb. Fire Extinguisher  
Triangle Kit  
1 Year Body, Arm & Hydraulic Warranty  
2 Year Cylinder Warranty

***City of Hallandale Beach Option Package:***

LED Mid Body Back-up Lights Includes (2) Lights  
LED Back-up Lights on Tailgate (2) Lights  
Integrated Strobe System: (2) Round Lights Lower Tailgate  
Integrated Strobe System: (2) Lights Front Body  
Full Hopper Cover  
Severe Refuse Package: 7GA AR Hopper Floor & Side Liner, Forward Panel of Body Side Wall  
7GA AR 450, Body Floor & GA AR 450 32" into Body, Chromium Overlay on Packer Guide Rails  
Zone Defense Wireless 2) Camera System with 7" Monitor  
Packer Auto Retract  
Lubecore Automatic Lube System for Body



## Chassis Specification

12/17/2018

|                |         | Description                       | Front Weight                                        | Rear Weight |
|----------------|---------|-----------------------------------|-----------------------------------------------------|-------------|
| AUTOCAR TRUCKS |         |                                   |                                                     |             |
| O              | ENG0001 | ENGINEERING GROUP IDENTIFIER      | AUTOCAR ENGINEERING                                 | 00          |
| O              | 5000002 | CAB SHELL                         | SINGLE RIGHT HAND DRIVE CAB                         | 00          |
| O              | 100U001 | CUSTOMER TYPE                     | MUNICIPAL                                           | 00          |
| SOLUTION       |         |                                   |                                                     |             |
| O              | C04012  | BODY COMPANY                      | NEW WAY                                             | 00          |
| O              | C02004  | BODY TYPE                         | AUTOMATED SIDE LOADER                               | 00          |
| O              | C003001 | TRUCK TYPE (WRENCH CODE)          | ASL, NEW WAY SIDEWINDER, WB219, NO AUX AXLE, DIESEL | 00          |
| O              | C06706  | BODY STYLE                        | NEW WAY SIDEWINDER                                  | 00          |
| O              | C05031  | TOTAL BODY CAPACITY - BODY/HOPPER | 31 YARD                                             | 00          |
| O              | C01003  | APPLICATION                       | REFUSE - LANDFILL                                   | 00          |
| O              | C11006  | BODY COMPANY SERVICE OPTION       | CONTAINER DUMP                                      | 00          |
| O              | C03001  | TERRITORY                         | EAST COAST                                          | 00          |
| O              | D010200 | FRONT GAWR                        | 20000 LBS                                           | 00          |
| O              | D020460 | REAR GAWR                         | 46000 LBS                                           | 00          |
| O              | D100660 | GVWR                              | 66000 LBS                                           | 00          |
| ENGINE         |         |                                   |                                                     |             |
| S              | 1012002 | ENGINE ASSY                       | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS        | 00          |
| ENGINE EQUIP   |         |                                   |                                                     |             |
| O              | 122002  | PTO-ENGINE FRONT                  | ADAPTER FOR SPICER 1350                             | 40-9        |
| O              | 2302001 | MUFFLER SYSTEM                    | LH VERT HORIZ DPF/SCR                               | 00          |
| O              | P010058 | VEHICLE GOVERNED SPEED LIMIT      | SPEED LIMIT 58 MPH (LIMITED BY PROP SHAFT CALCS)    | 00          |
| TRANSMISSION   |         |                                   |                                                     |             |
| O              | 2700028 | TRANSMISSION                      | ALLISON 4500 SERIES,6-SPEED                         | 38459       |
| FRONT AXLE     |         |                                   |                                                     |             |
| S              | 3700002 | FRONT AXLE                        | MERITOR MFS-20 STEER AXLE, 20000# CAPACITY          | 00          |

|   |        |               |                                            |   |   |
|---|--------|---------------|--------------------------------------------|---|---|
| O | 383107 | STEERING GEAR | INTEGRAL POWER STEERING<br>W/LEFT HAND RAM | 0 | 0 |
|---|--------|---------------|--------------------------------------------|---|---|

#### REAR AXLE

|   |         |                                    |                                             |   |     |
|---|---------|------------------------------------|---------------------------------------------|---|-----|
| O | 330444  | REAR DRIVE AXLE-SINGLE<br>& TANDEM | MERITOR RT46-160 46,000 LB                  | 0 | 430 |
| O | 331614  | REAR DRIVE AXLE RATIO              | 6.14                                        | 0 | 0   |
| O | 3500004 | REAR SUSPENSION                    | HENDRICKSON HMX-460<br>SUSP @ 54" AS        | 0 | 0   |
| O | 359001  | SHOCK ABSORBERS-REAR               | 4 SHOCK ABSORBERS<br>HENDRICKSON SUSPENSION | 0 | 31  |

#### CHASSIS

|   |         |                                |                                                                                          |     |      |
|---|---------|--------------------------------|------------------------------------------------------------------------------------------|-----|------|
| O | 400219  | WHEELBASE                      | 219 INCHES                                                                               | 17  | 20   |
| O | 402074  | FRAME-REAR OVERHANG            | 74"                                                                                      | 42  | -150 |
| O | 404002  | FRAME REINFORCEMENT<br>INNER   | .25" LINER, STANDARD<br>LENGTH                                                           | 134 | 387  |
| O | 892014  | BACKUP ALARM                   | ECCO SMART ALARM SA917                                                                   | 0   | 1    |
| O | 4470003 | LH FUEL TANK SPACERS           | LH FUEL TANK SPACED 2",<br>DROPPED 2"                                                    | 7   | 5    |
| O | 4280003 | DRILLING FUEL TK SUPT-<br>LEFT | FUEL TANK LHS LOCATION -<br>SPEC DRIVEN                                                  | 0   | 0    |
| O | 8160013 | BATTERY BOX SPACERS            | BATTERY BOX SPACED 2",<br>DROPPED 0" ON SPACERS<br>WITH SPACERS DROPPED<br>ADDITIONAL 2" | 0   | 0    |
| O | 8090003 | BATTERY BOX DRILLING           | BATTERY BOX LOCATION -<br>SPEC DRIVEN                                                    | 0   | 0    |
| O | 8140003 | BATTERY SHUT-OFF<br>SWITCH     | SHUTOFF W/ LOCKOUT &<br>EMERGENCY JUMPER STUDS                                           | 5   | 2    |
| O | 7090003 | AIR TANK DRILLING              | AIR TANKS LOCATION SPEC<br>DRIVEN                                                        | 0   | 0    |
| O | 715T003 | AIR RESERVOIR DRAIN<br>SYSTEM  | CENTRAL MANIFOLD W/<br>PETCOCKS                                                          | 2   | 2    |
| O | 7100008 | AIR DRYER DRILLING             | AIR DRYER MTD OUTSIDE<br>RAIL, RHS, SPEC DRIVEN                                          | 0   | 0    |

#### CAB EXTERIOR

|   |         |                               |                                                                           |    |   |
|---|---------|-------------------------------|---------------------------------------------------------------------------|----|---|
| O | 511005  | VISIBILITY WINDOW             | LH & RH DOOR                                                              | 0  | 0 |
| O | 5120001 | POWER WINDOWS                 | DUAL INTERNAL<br>REGULATOR POWER<br>WINDOWS                               | 4  | 0 |
| O | 6220018 | MIRRORS-DUAL WEST<br>COAST    | MIRROR, BLACK, HTD,<br>REMOTE, W / MARKER<br>LIGHT, W / LWR HTD<br>CONVEX | 0  | 0 |
| O | 6180003 | DOWN VIEW MIRRORS             | DUAL DOWN VIEW<br>MIRRORS, ONE EACH SIDE                                  | 2  | 0 |
| O | 661002  | CAB TILT MECHANISM-<br>C.O.E. | HYDRAULIC TILT WITH AIR<br>ASSIST                                         | 20 | 0 |



### CAB INTERIOR

|   |         |                              |                                         |   |   |
|---|---------|------------------------------|-----------------------------------------|---|---|
| O | 538004  | CARPET & MAT                 | ALUMINUM DIAMOND<br>PLATE - DRIVER SIDE | 4 | 2 |
| O | 8750001 | ADDITIONAL ELEC.<br>SWITCHES | 2 DASH SWITCHES, WIRED<br>TO POWER      | 1 | 0 |

### RADIO/MISC

|   |         |                      |                                   |    |    |
|---|---------|----------------------|-----------------------------------|----|----|
| O | 5900008 | RADIO                | AM/FM/WB/MP3/CD/USB/BLU<br>ETOOTH | 13 | -4 |
| O | 5910002 | ANTENNA/POWER SUPPLY | ANTENNA - ROOF MOUNTED            | 0  | 0  |
| O | 596005  | RADIO SPEAKERS       | 2 DUAL CONE SPEAKERS              | 0  | 0  |

### FRONT TIRES / WHEELS

|   |         |                                      |                                          |    |   |
|---|---------|--------------------------------------|------------------------------------------|----|---|
| O | 9050017 | WHEELS-DISC FRONT                    | 22.5X12.25" STEEL, 4.75"<br>INSET, HAYES | 32 | 0 |
| O | 930821  | TIRE SIZE & LOAD RANGE<br>- FRONT    | 425/65R22.5L                             | 0  | 0 |
| O | 9310040 | TIRE MANUFACTURER &<br>TREAD - FRONT | GOODYEAR G296 WHA W /<br>DURASEAL        | 92 | 0 |

### REAR TIRES / WHEELS

|   |         |                                     |                               |   |   |
|---|---------|-------------------------------------|-------------------------------|---|---|
| O | 9342001 | TIRE MANUFACTURER &<br>TREAD - REAR | GOODYEAR G751 MSA<br>DURASEAL | 0 | 0 |
|---|---------|-------------------------------------|-------------------------------|---|---|

### ADDITIONAL OPTIONS

|   |         |                                                  |                                                                                     |   |   |
|---|---------|--------------------------------------------------|-------------------------------------------------------------------------------------|---|---|
| O | 899A203 | TRANSMISSION<br>WARRANTY                         | ALLISON 5YR. EXT<br>WARRANTY                                                        | 0 | 0 |
| O | 899B207 | ENGINE WARRANTY                                  | 2017 L9 HD1 5YRS/150K<br>MILES EXTENDED<br>WARRANTY PP1 MATRIX<br>231156            | 0 | 0 |
| O | 899K200 | EXHAUST<br>AFTERTREATMENT<br>EXTENDED WARRANTIES | 2017 L9 AT3<br>AFTERTREATMENT<br>5YRS/150K MILES EXTENDED<br>WARRANTY MATRIX 231445 | 0 | 0 |

### OTHERS

|   |         |                             |                                      |   |   |
|---|---------|-----------------------------|--------------------------------------|---|---|
| O | 9722018 | CERTIFICATION-<br>EMISSIONS | COMPLIES WITH 2018 U.S.<br>EMISSIONS | 0 | 0 |
|---|---------|-----------------------------|--------------------------------------|---|---|

### SUB TOTALS


|                              |        |       |
|------------------------------|--------|-------|
| BASE WEIGHT                  | 10,431 | 6,154 |
| FACTORY OPTION WEIGHT        | 812    | 749   |
| DISTRIBUTOR OPTION<br>WEIGHT | 0      | 0     |

### TOTALS

|                   |        |       |        |
|-------------------|--------|-------|--------|
| TOTAL WEIGHT (LB) | 11,243 | 6,903 | 18,146 |
|-------------------|--------|-------|--------|

## Dimensions

12/17/2018

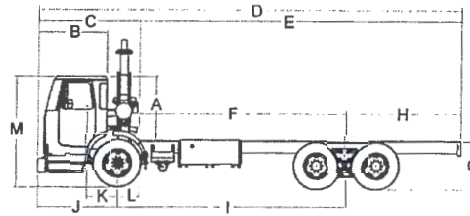


|   | Dimension(ft) | Description                     |
|---|---------------|---------------------------------|
| A | 59.00         | CAB HEIGHT                      |
| B | 62.00         | BUMPER TO BACK OF CAB           |
| C | 95.00         | EFFECTIVE BUMPER TO BACK OF CAB |
| D | 364.00        | OVERALL LENGTH                  |
| E | 269.00        | EFFECTIVE CAB TO END OF FRAME   |
| F | 195.00        | EFFECTIVE CAB TO REAR AXLE      |
| G | 43.25         | UNLADEN FRAME HEIGHT            |
| H | 74.00         | OVERHANG                        |
| I | 219.00        | WHEELBASE                       |
| J | 71.00         | BUMPER TO FRONT AXLE            |
| K | -24.00        | DRIVER CENTER OF GRAVITY        |
| L | 24.00         | EFFECTIVE FRONT AXLE TO BACK    |
| M | 102.25        | OVERALL HEIGHT                  |
| N | 0.00          | FRONT FRAME EXTENSION           |

### SPECIFICATION SUMMARY

|                 |                                              |
|-----------------|----------------------------------------------|
| Model           | ACX64 Class 8                                |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Transmission    | ALLISON 4500 SERIES, 6-SPEED                 |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |

## Turning Radius

12/17/2018

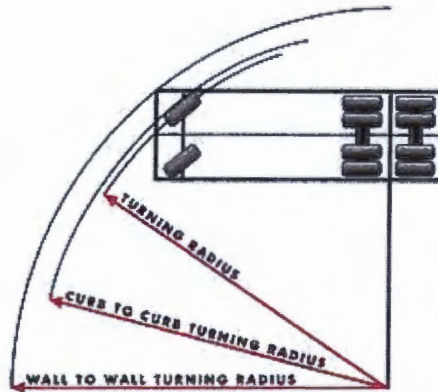


|   | Dimension(ft) | Description                   |
|---|---------------|-------------------------------|
| A | 36.88         | TURNING RADIUS                |
| B | 76.48         | CURB TO CURB TURNING DIAMETER |
| C | 81.93         | WALL TO WALL TURNING DIAMETER |

### SPECIFICATION SUMMARY

|                 |                                              |
|-----------------|----------------------------------------------|
| Model           |                                              |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Transmission    | ALLISON 4500 SERIES,6-SPEED                  |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |

## Shift Chart

12/17/2018

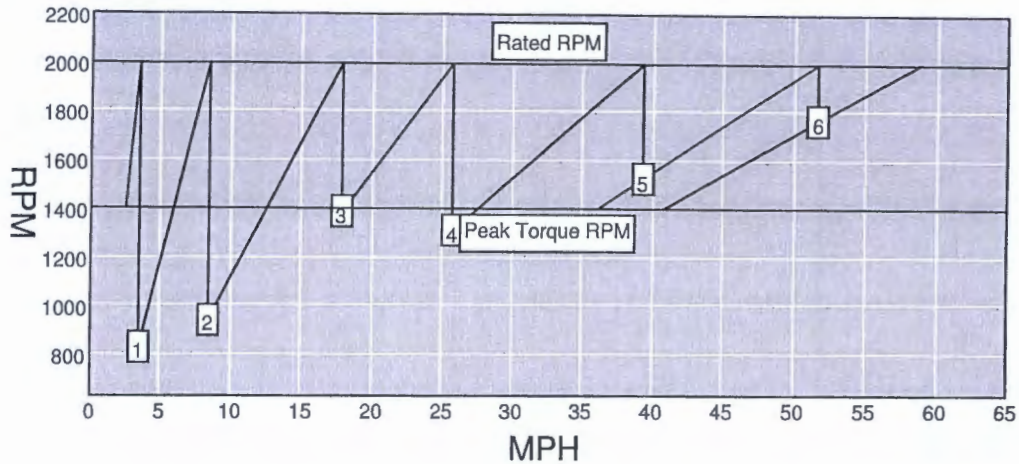

| Gear | Trans. Ratio | Rear Axle Ratio | Overall Reduction | % Split | MPH  | RPM After Shift |
|------|--------------|-----------------|-------------------|---------|------|-----------------|
| 1C   | 11.37        | 6.14            | 69.8              | 0.0     | 3.5  | 0               |
| 1    | 4.70         | 6.14            | 28.9              | 141.9   | 8.4  | 826             |
| 2    | 2.21         | 6.14            | 13.6              | 112.7   | 17.8 | 940             |
| 3    | 1.53         | 6.14            | 9.4               | 44.4    | 25.7 | 1,384           |
| 4    | 1.00         | 6.14            | 6.1               | 53.0    | 39.3 | 1,307           |
| 5    | 0.76         | 6.14            | 4.7               | 31.6    | 51.7 | 1,520           |
| 6    | 0.67         | 6.14            | 4.1               | 13.4    | 58.7 | 1,763           |


### SPECIFICATION SUMMARY

|                 |                                              |
|-----------------|----------------------------------------------|
| Model           | ACX64 Class 8                                |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Rated Power     | 350 HP @ 2000 RPM                            |
| Peak Torque     | 1150 LB-FT @ 1400                            |
| Transmission    | ALLISON 4500 SERIES,6-SPEED                  |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |
| Tire Revolution | 497                                          |



## Operating Range

12/17/2018

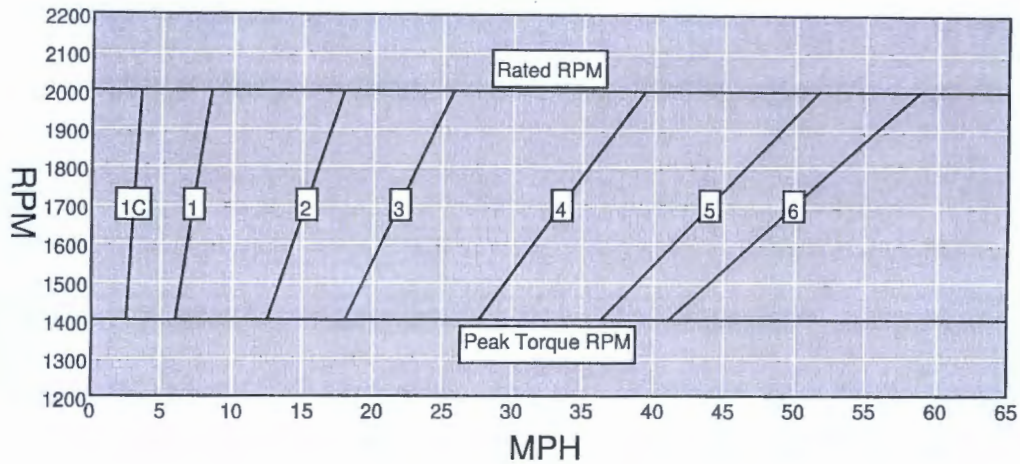

| Gear | Trans. Ratio | Rear Axle Ratio | Minimum MPH | Maximum MPH |
|------|--------------|-----------------|-------------|-------------|
| 1C   | 11.37        | 6.14            | 2.4         | 3.5         |
| 1    | 4.70         | 6.14            | 5.9         | 8.4         |
| 2    | 2.21         | 6.14            | 12.5        | 17.8        |
| 3    | 1.53         | 6.14            | 18.0        | 25.7        |
| 4    | 1.00         | 6.14            | 27.5        | 39.3        |
| 5    | 0.76         | 6.14            | 36.2        | 51.7        |
| 6    | 0.67         | 6.14            | 41.1        | 58.7        |

### SPECIFICATION SUMMARY


|                 |                                              |
|-----------------|----------------------------------------------|
| Model           | ACX64 Class 8                                |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Rated Power     | 350 HP @ 2000 RPM                            |
| Peak Torque     | 1150 LB-FT @ 1400                            |
| Transmission    | ALLISON 4500 SERIES, 6-SPEED                 |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |
| Tire Revolution | 497                                          |

Prepared By David Yglesias  
Quote Id : QAYYEH2Q  
Quote Number : Q0033887  
Model : 2020 - ACX64 Class 8

Prepared For Y Loba  
City of Hallendale Beach

## Gradeability

12/17/2018

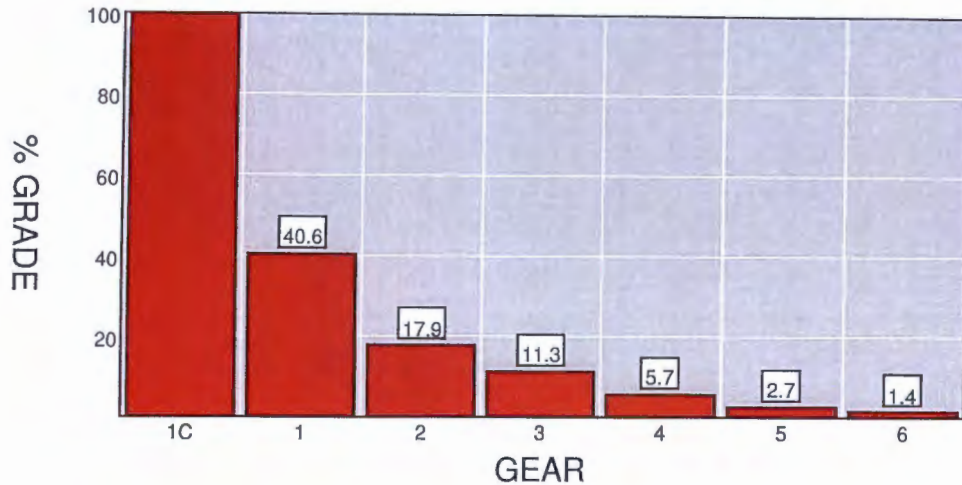


| Gear | Trans.<br>Ratio | Rear Axle<br>Ratio | Overall<br>Reduction | Peak<br>Torque | Wheel<br>HP | MPH  | Maximum<br>Grade% |
|------|-----------------|--------------------|----------------------|----------------|-------------|------|-------------------|
| 1C   | 11.37           | 6.14               | 69.8                 | 1,150.0        | 279.6       | 2.4  | 100.1             |
| 1    | 4.70            | 6.14               | 28.9                 | 1,150.0        | 279.6       | 5.9  | 40.6              |
| 2    | 2.21            | 6.14               | 13.6                 | 1,150.0        | 279.6       | 12.5 | 17.9              |
| 3    | 1.53            | 6.14               | 9.4                  | 1,150.0        | 279.6       | 18.0 | 11.3              |
| 4    | 1.00            | 6.14               | 6.1                  | 1,150.0        | 279.6       | 27.5 | 5.7               |
| 5    | 0.76            | 6.14               | 4.7                  | 1,150.0        | 279.6       | 36.2 | 2.7               |
| 6    | 0.67            | 6.14               | 4.1                  | 1,150.0        | 279.6       | 41.1 | 1.4               |

### SPECIFICATION SUMMARY

|                 |                                              |
|-----------------|----------------------------------------------|
| Model           | ACX64 Class 8                                |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Peak Torque     | 1150 LB-FT @ 1400                            |
| Transmission    | ALLISON 4500 SERIES, 6-SPEED                 |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |
| Tire Revolution | 497                                          |
| GVW/GCV         | 0                                            |
| Surface         | Concrete                                     |

## Startability

12/17/2018

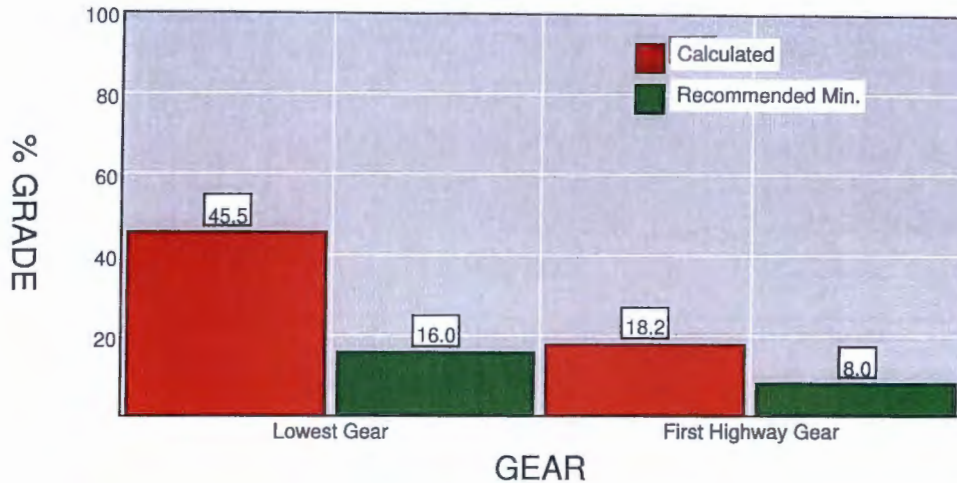

| Gear               | Application      | Recommended Minimum Grade % | Calculated Grade % |
|--------------------|------------------|-----------------------------|--------------------|
| Lowest Gear        | City             | 12.0                        | n/a                |
|                    | On Highway       | 16.0                        | 45.5               |
|                    | On-Off Highway   | 18.0                        | n/a                |
|                    | Off Highway      | 20.0                        | n/a                |
|                    |                  | 0.0                         | n/a                |
| First Highway Gear | All Applications | 8.0                         | 18.2               |

### "SPECIFICATION SUMMARY"

|                 |                                              |
|-----------------|----------------------------------------------|
| Model           | ACX64 Class 8                                |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Clutch Torque   | 550 LB-FT 700 RPM                            |
| Transmission    | ALLISON 4500 SERIES, 6-SPEED                 |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |
| Tire Radius     | 19.6                                         |
| GVW/GCV         | 0                                            |
| Surface         | Concrete                                     |
| Terrain         | On Highway                                   |

## Top Speed

12/17/2018

### Speed At Maximum RPM

---



### RPM At 60MPH

---



|                          | MPH  | RPM   |
|--------------------------|------|-------|
| Top Speed                | 58.7 | 2,000 |
| Cruise Speed             | 60.0 | 2,044 |
| Minimum Of Engine Range  | 35.2 | 1,200 |
| Maximum Of Engine Range  | 58.7 | 2,000 |
| Minimum Of Economy Range | 35.2 | 1,200 |
| Maximum Of Economy Range | 64.6 | 2,200 |



Prepared By David Yglesias  
Quote Id : QAYYEHD2Q  
Quote Number : Q0033887  
Model : 2020 - ACX64 Class 8

Prepared For Y Lobo  
City of Hallendale Beach

#### **SPECIFICATION SUMMARY**

|                 |                                              |
|-----------------|----------------------------------------------|
| Model           | ACX64 Class 8                                |
| Engine          | L9 '17 350HP / 2200RPM / 1150 LB-FT, CUMMINS |
| Transmission    | ALLISON 4500 SERIES,6-SPEED                  |
| Rear Axle       | MERITOR RT46-160 46,000 LB                   |
| Rear Axle Ratio | 6.14                                         |
| Rear Tire       | 11R22.5H                                     |
| Tire Revolution | 497                                          |

12/17/2018

## ***GAWR, GVWR & Tire Pressure***

| <b>GVW Rating – 66,000#</b> |                |                          |                |
|-----------------------------|----------------|--------------------------|----------------|
| <b>Front GAWR</b>           | <b>20,000#</b> | <b>Rear GAWR</b>         | <b>46,000#</b> |
| Front Suspension            | 20,800#        | Rear Suspension          | 46,000#        |
| Front Wheels                | 22,800#        | Rear Wheels              | 59,100#        |
| Front Tire Size And Tread   | 22,800#        | Rear Tire Size And Tread | 48,000#        |
| Front Brakes                | 20,000#        | Rear Brakes              | 52,000#        |
| Front Axle                  | 20,000#        | Rear Axle                | 46,000#        |
| <b>PSI</b>                  |                |                          |                |
| Front PSI                   | 105.0          | Rear PSI                 | 105.0          |